

/ Perfect Welding / Solar Energy / Perfect Charging



SHIFTING THE LIMITS

# FRONIUS GALVO

/ Not just an inverter, but an energy management system.



/ SnapInverter technology



/ Integrated data communication



/ SuperFlex Design



/ Dynamic Peak Manager



/ Smart Grid Ready



/ PC board replacement process




/ With power categories ranging from 1.5 to 3.1 kW, the Fronius Galvo is perfect for households – and is especially suitable for self-consumption systems. The integrated energy management relay allows the self-consumption component to be maximised. A host of other smart features make the Fronius Galvo one of the most future-proof inverters in its class: for example, the integrated datalogging, the simple connection to the internet by WLAN, or the plug-in card technology for retrofitting additional functions.

## TECHNICAL DATA FRONIUS GALVO


INPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
DC maximum power at $\cos \varphi = 1$ <sup>1)</sup>	1,600 W	2,140 W	2,650 W	3,160 W	3,310 W
Max. input current ( $I_{dc,max}$ )	13.3 A	17.8 A	16.6 A	19.8 A	20.7 A
Max. array short circuit current	20.0 A	26.8 A	24.8 A	29.6 A	31.0 A
Min. input voltage ( $U_{dc,min}$ )		120 V		165 V	
Feed-in start voltage ( $U_{dc,start}$ )		140 V		185 V	
Nominal input voltage ( $U_{dc,r}$ )		260 V		330 V	
Max. input voltage ( $U_{dc,max}$ )		420 V		550 V	
MPP voltage range ( $U_{mpp,min} - U_{mpp,max}$ )		120 - 335 V		165 - 440 V	
Number of MPP trackers			1		
Number of DC connections			3		
OUTPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
AC nominal output ( $P_{ac,r}$ )	1,500 W	2,000 W	2,500 W	3,000 W	3,100 W
Max. output power	1,500 VA	2,000 VA	2,500 VA	3,000 VA	3,100 VA
Max. output current ( $I_{ac,max}$ )	7.2 A	9.7 A	12.1 A	14.5 A	15.0 A
Grid connection (voltage range)			1-NPE 230 V (+17 % / -20 %)		
Frequency (frequency range)			50 Hz / 60 Hz (45 - 65 Hz)		
Total harmonic distortion			< 4 %		
Power factor ( $\cos \varphi_{ac,r}$ )			0.85 - 1 ind. / cap.		
GENERAL DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
Dimensions (height x width x depth)			645 x 431 x 204 mm		
Weight	16.4 kg			16.8 kg	
Degree of protection			IP 65		
Protection class			1		
Overvoltage category (DC / AC) <sup>2)</sup>			2 / 3		
Night-time consumption			< 1 W		
Inverter concept			HF transformer		
Cooling			Regulated air cooling		
Installation			Indoor and outdoor installation		
Ambient temperature range			-25 - +50 °C		
Permitted humidity			0 to 100 %		
Max. altitude		2,000 m / 3,500 m (unrestricted / restricted voltage range)			
DC connection technology		Screw terminal connection 2.5 mm <sup>2</sup> - 16 mm <sup>2</sup>			
AC connection technology		Screw terminal connection 2.5 mm <sup>2</sup> - 16 mm <sup>2</sup>			
Certificates and compliance with standards	ÖVE / ÖNORM E 8001-4-712, AS 4777-2, AS 4777-3, AS3100, DIN V VDE 0126-1-1/A1, VDE AR N 4105, IEC 62109-1-2, IEC 62116, IEC 61727, CER 06-190, CEI 0-21, EN 50438, G83, G59, NRS 097				

<sup>1)</sup> Maximum power inverter can convert <sup>2)</sup> Testing to IEC 62109-1.

## FRONIUS GALVO 3.1-1 EFFICIENCY CURVE

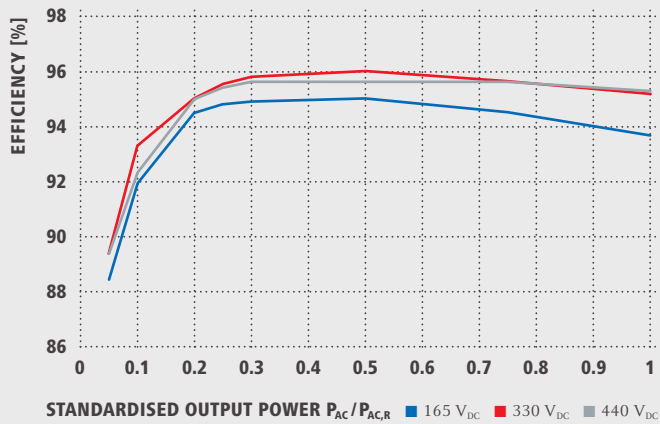

## FRONIUS GALVO 3.1-1 TEMPERATURE DERATING

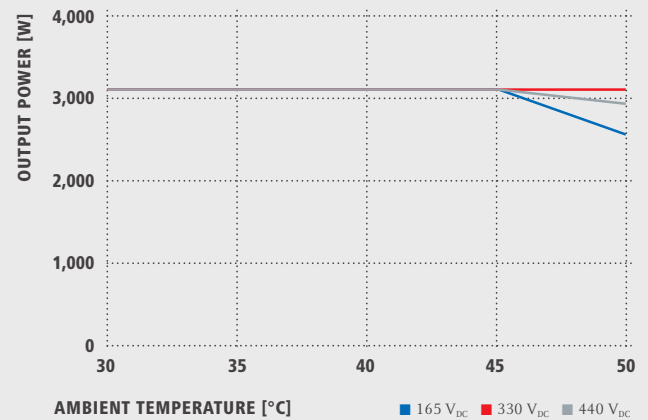

## TECHNICAL DATA FRONIUS GALVO

EFFICIENCY	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
Max. efficiency	95.9 %	96.0 %		96.1 %	
European efficiency ( $\eta_{EU}$ )	94.5 %	94.9 %	95.2 %	95.4 %	95.4 %
$\eta$ at 5 % $P_{AC,r}$ <sup>1)</sup>	84.5 / 86.0 / 86.0 %	84.2 / 86.1 / 85.9 %	88.6 / 89.6 / 89.4 %	88.2 / 89.2 / 89.1 %	88.4 / 89.4 / 89.4 %
$\eta$ at 10 % $P_{AC,r}$ <sup>1)</sup>	87.5 / 89.7 / 89.6 %	89.6 / 91.4 / 91.3 %	91.2 / 92.3 / 91.4 %	91.8 / 93.1 / 92.1 %	91.9 / 93.3 / 92.3 %
$\eta$ at 20 % $P_{AC,r}$ <sup>1)</sup>	91.3 / 93.3 / 93.1 %	92.6 / 94.3 / 93.9 %	94.0 / 94.8 / 94.5 %	94.4 / 95.0 / 94.9 %	94.5 / 95.0 / 95.0 %
$\eta$ at 25 % $P_{AC,r}$ <sup>1)</sup>	92.4 / 94.1 / 93.9 %	93.3 / 94.9 / 94.5 %	94.5 / 95.1 / 95.0 %	94.8 / 95.5 / 95.3 %	94.8 / 95.5 / 95.4 %
$\eta$ at 30 % $P_{AC,r}$ <sup>1)</sup>	93.0 / 94.6 / 94.3 %	93.6 / 95.2 / 94.9 %	94.8 / 95.5 / 95.3 %	94.8 / 95.7 / 95.6 %	94.9 / 95.8 / 95.6 %
$\eta$ at 50 % $P_{AC,r}$ <sup>1)</sup>	93.9 / 95.5 / 95.2 %	94.3 / 95.8 / 95.2 %	95.0 / 95.7 / 95.2 %	95.0 / 96.0 / 95.5 %	95.0 / 96.1 / 95.6 %
$\eta$ at 75 % $P_{AC,r}$ <sup>1)</sup>	94.2 / 95.6 / 95.4 %	94.0 / 95.9 / 95.6 %	94.8 / 95.9 / 95.6 %	94.6 / 95.8 / 95.6 %	94.5 / 95.6 / 95.6 %
$\eta$ at 100 % $P_{AC,r}$ <sup>1)</sup>	94.0 / 95.9 / 95.6 %	93.5 / 95.6 / 95.5 %	94.4 / 95.7 / 95.5 %	93.9 / 95.4 / 95.3 %	93.7 / 95.2 / 95.3 %
MPP adaptation efficiency	> 99.9 %				

PROTECTION DEVICES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
DC insulation measurement	Warning/shutdown (depending on country setup) at $R_{ISO} < 600 \text{ k}\Omega$				
Overload behavior	Operating point shift, power limitation				
DC disconnecter	Included				

INTERFACES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
WLAN / Ethernet LAN	Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)				
6 inputs and 4 digital inputs/outputs	Interface to ripple control receiver				
USB (A socket) <sup>2)</sup>	Datalogging, inverter update via USB flash drive				
2x RS422 (RJ45 socket) <sup>2)</sup>	Fronius Solar Net				
Signalling output <sup>2)</sup>	Energy management (floating relay output), Earth Fault Alarm				
Datalogger and Webserver	Included				
External input	S)-Meter Interface / Input for overvoltage protection				
RS485	Modbus RTU SunSpec or meter connection				

<sup>1)</sup> And at  $U_{mpp \text{ min}} / U_{dc,r} / U_{mpp \text{ max}}$ . <sup>2)</sup> Also available in the light version.

/ Perfect Welding / Solar Energy / Perfect Charging

### WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,300 employees worldwide, we shift the limits of what's possible - our record of over 900 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at [www.fronius.com](http://www.fronius.com)

v05 May 2015 EN

Fronius Australia Pty Ltd.  
90-92 Lambeck Drive  
Tullamarine VIC 3043  
Australia  
pv-sales-australia@fronius.com  
www.fronius.com.au